

FOREST

DRAPERY HARDWARE



Corded Contract System


CCS[®] Corded Contract System

Product information

- Heavy duty cord traverse system, with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Bendable; it can be curved and reversed curved with a 20 cm (8") radius or continuous curve.
- Heavy duty clickable carriers - 10 carriers on a breakaway strip - UV protected.
- Can also be used for ripplefold and accordiafold drapery systems.
- Maximum fabric weight: 8 kg. per mtr (5,3 LBS per ft).
- Colours available: white, silver.
- Track finish: chromated powder coating with a factory applied patented dry lubricant.
- Lengths available: 3.66 m (12'), 4.27 m (14'), 4.88 m (16'), 5.8 m (19'), 6.10 m (20').
- Limited lifetime warranty.

Profile


- Shown actual size 1:1
- Aluminium Extrusion
- Weight: 300 gram per mtr (3.22 ounce per ft)
- Dimensions: 20 mm x 20 mm (3/4" x 3/4")

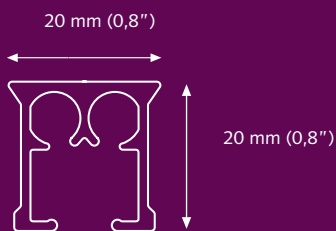

For use in

Hotels - motels - offices - healthcare - schools - residential or any location where a heavy duty cord traverse system is required.

Applications

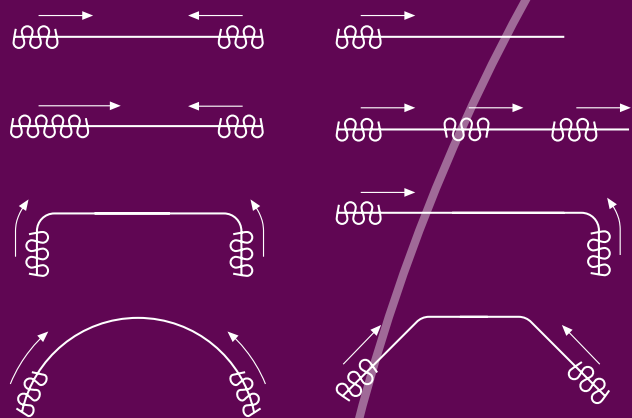


Bending/curving

The track can be curved and reversed curved using a 20 cm (8") radius. Continuous curving can be done with the electric powered bender or by special order from factory.



- ① Carrier
- ② Master carrier underlap
- ③ Traverse cord
- ④ Master carrier overlap
- ⑤ Cord connector
- ⑥ CCS Track
- ⑦ End puley

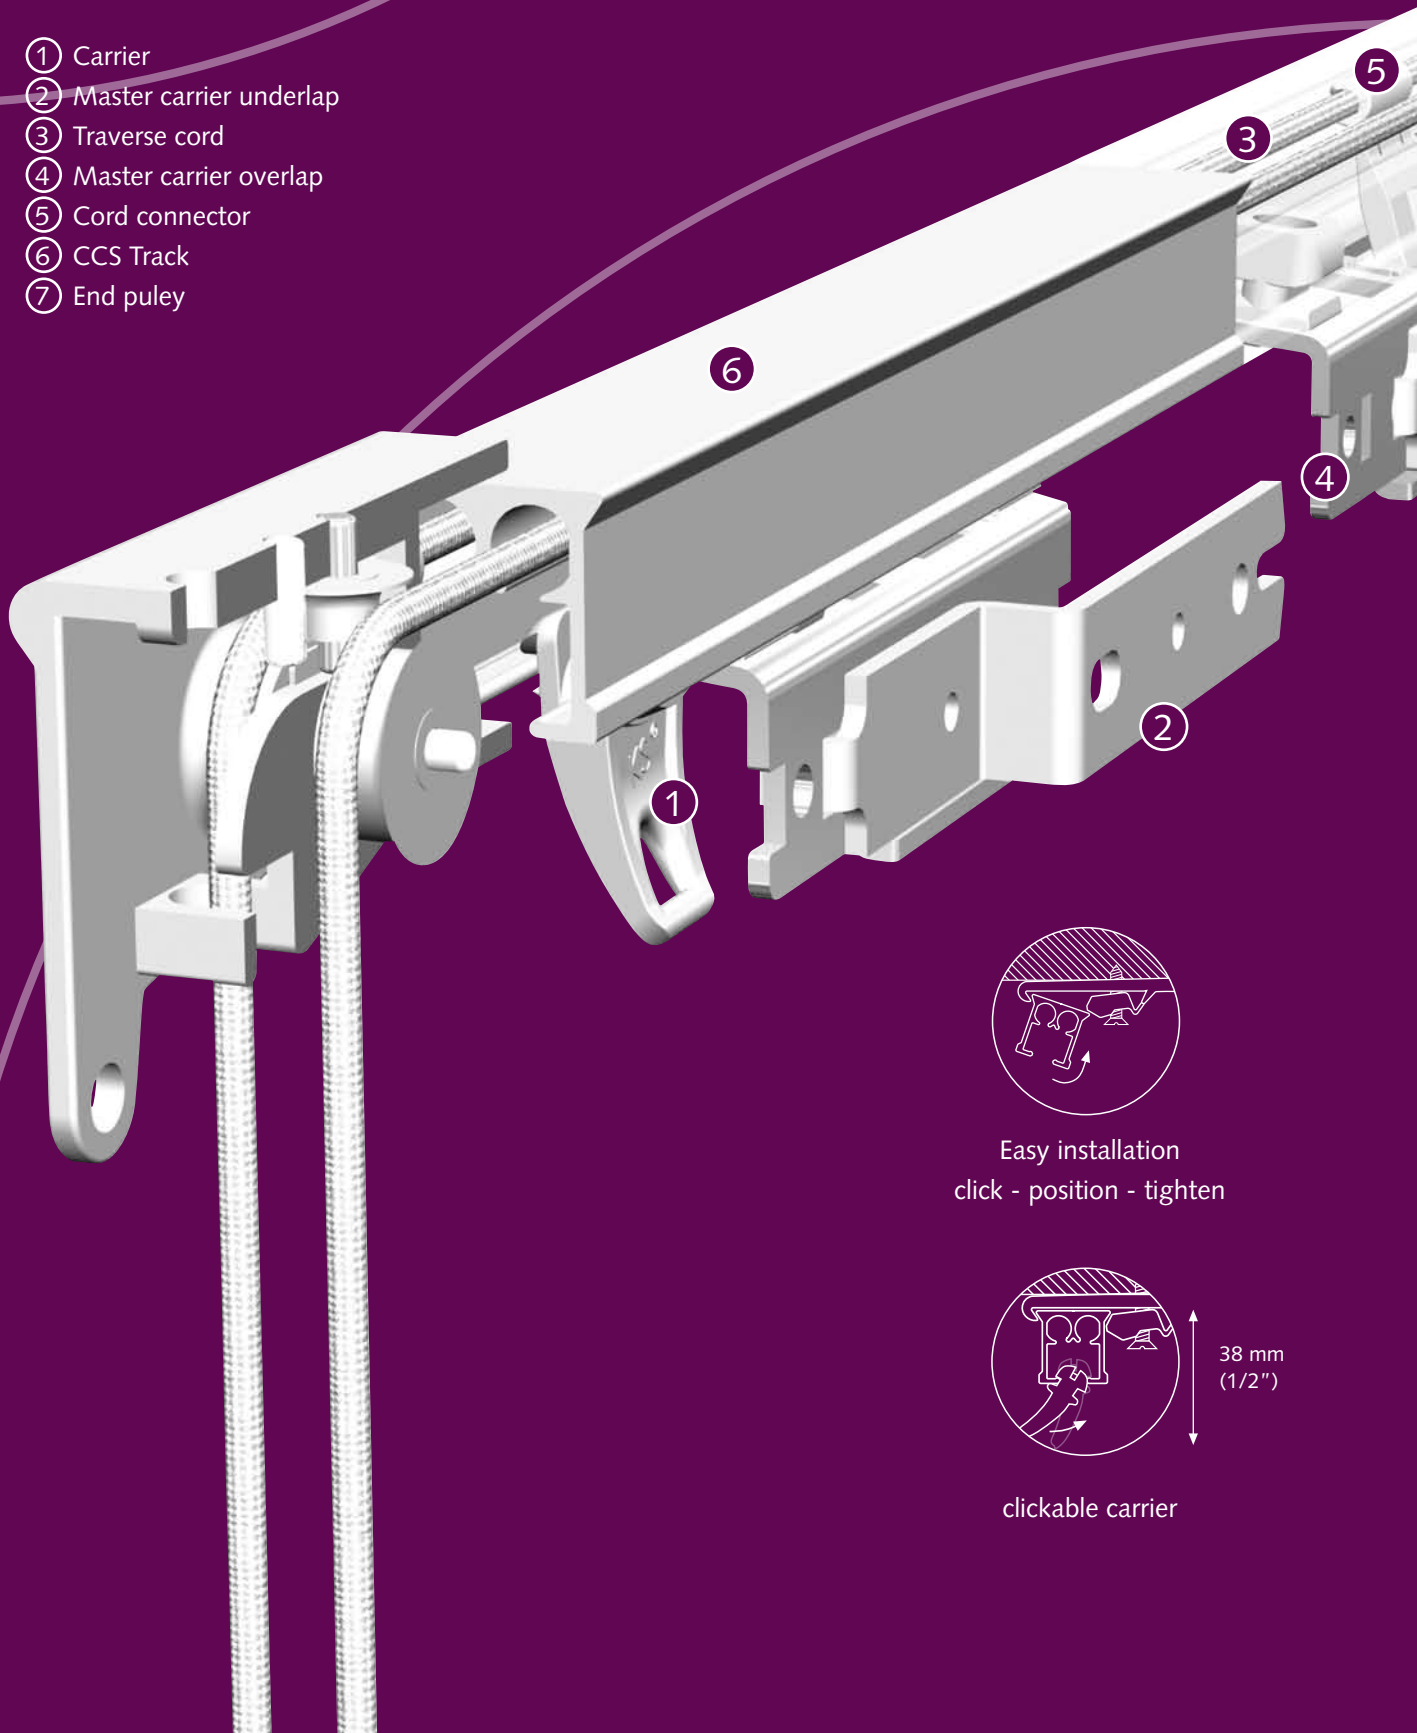


Easy installation
click - position - tighten



38 mm
(1/2")

clickable carrier

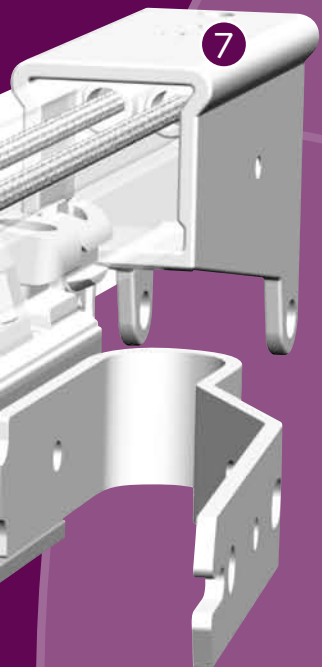


Mounting Brackets

Wall bracket aluminium single

A) 7,5 cm (3") : B) 6,3 cm (2")


A) 10 cm (4") : B) 8,8 cm (3")

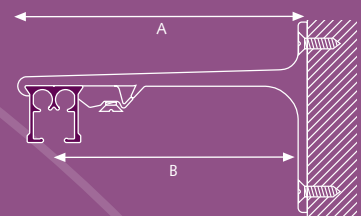


Wall bracket aluminium double

A) 15 cm (6") : B) 9,2 cm (3") , C) 4,5 cm (2")

A) 20 cm (8") : B) 9,2 cm (3") , C) 9,5 cm (4")

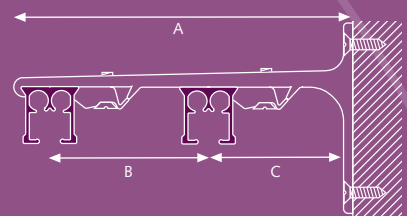

Ceiling bracket



A) Min. 10 cm (4")




A) Min. 15 cm (6")



Wall bracket aluminium triple

25 cm (10")

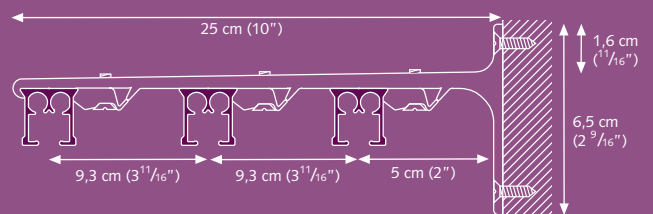


Other brackets are available, see CS brochure.
Brackets need to be placed every 60 cm (24").

Colours available from stock:

Complete the art.nr. with the indicated colour-code

01 White**03 Silver**

Other colours can be delivered on request.

**CCS Track**

Extruded aluminium chromated, powder-coated. Factory lubricated for wall or ceiling mounting. Inches 3.66 m. (12'), 4.27 m. (14'), 4.88 m. (16'), 5.8 m. (19'), 6.10 m. (20'). Colours: 01, 03.

30010.. ..cm
10/bundle**Carrier**

Contract klik carrier patented, clickable. UV-resistant

25101.. 000
250/box**CCS Cord Master Carrier R/L Underlap**

Multifunctional - reversible arm - will go through curves, will also fit stiffeners and cord connector.


3015601000
15/box**CCS Cord Master Carrier R/L Overlap**

Multifunctional - reversible arm - will go through curves, will also fit stiffeners and cord connector.


3015701000
15/box**CCS/FMS Master Carrier**

Overlap Single R/L

Multifunctional - arm is reversible - will go through curves, will fit stiffeners. Colours: 01.

3016001000
15/box**CCS Cord Connector**

Connects cord to the master carrier.

3030301000
100/box**Pulley**


Reversible, for two way draw.

30301.. 000
25/box**End Pulley Small**


Reversible, for non stacking side on one way draw.

30302.. 000
25/box**Inside Wall Bracket**

For additional support anywhere the pulley meets the wall.

3022301000
25/box**Straight Return R/L**

Adjustable from 7,5 cm (3") to 25 cm (10").

3022501000
10/box**Traverse Cord**


Nylon drapery cord designed for strong smooth slide, Ø 3.5 mm (0,14"), 16 ply. White.

1030401000
250 mtr/roll**Tension Pulley**


Plastic, white.

1030501000
25/box**Cord Weight**

Plastic, white.

3030601000
25/box**Smart Klick Ceiling Bracket**

"Klicks" onto track, powder coated. Install with counter sunk head screw 4 mm (0,16").


10182..000
100/box**Adjustable Wall Bracket**

Smart klick, adjustable single from 7,5 cm (3") to 11,5 cm (4.5")

10208..115
100/box

double from 6,5 cm (2,5") to 10 cm (4") - 15 cm (6") to 19,5 cm (7,5")


10208..195
50/box



Aluminium Wall Bracket
Smart klick, powder coated.

10203... ..cm

7,5 cm single	(3")	20/box
10 cm single	(4")	20/box
15 cm double	(6")	15/box
20 cm double	(8")	15/box
25 cm triple	(10")	10/box




Contract Bending tool
For CS/CCS/FMS/CRS/MTS

2560000000
1/each

CS/CCS/FMS Bending Wheel All-in

2561000000
1/each




CCS Replacement Bending Strips
For CCS track, length 90 cm (35,4").

3060100000
1/set


For CCS electric powered bender.
Length 7 meter (23').

2060300000
1/each



Bending Standard
Standard for CS/CCS bending tool

2560800000
1/each




Electric Powered Bender
Available in 230V or 115V, to create continuous curves and arches.
Minimum radius 50 cm (20").

1060500000
1/box



Bending Wheels
For electric powered bender.
Complete set of 3 wheels.
For CS/CCS track only.

2560700000
1/set



Electric Powered Railcutter
230 Volt EU
115 Volt USA
230 Volt UK

1061100000
1061200001
1061200002

Replacement Blade
For electric powered railcutter.

1061200000
1/each

Distributor:

FOREST
DRAPERY HARDWARE