


CCS® & CKS® - Assemblage - cord

Instructions for assembling CCS® & CKS® center- and one-way draw, with cord.


Necessary items:	Articlenumber:	Necessary items:	Articlenumber:
CCS-track	30010..	CKS-track	1501001.....
Nylon cord	1030401000	Nylon cord	1030401000
CCS Master Carrier Overlap R/L	30157...000	CKS Master Carrier Overlap R/L	1515701000
CCS Master Carrier Underlap R/L	30156...000	CKS Master Carrier Underlap R/L	1515601000
CCS End Pulley	30301...000	CKS Pulley	1530101000
CCS End Pulley Small	30302...000	CKS Cord Connector	1530301000
CKS Cord Connector	3030301000	Drill with bit 1	
Drill with bit 1		Lighter (for heathen the nylon cord)	
Lighter (for heathen the nylon cord)			




1 Determining track-length: CKS® minus 8 cm (3,2" for center closing and one-way draw), CCS® minus 8 cm (center closing) and minus 6,5 cm (one-way draw). Determining cord-length: 2 times track length + 2 times the desired drop height of the cord. Cut the nylon cord by heating it with the lighter.

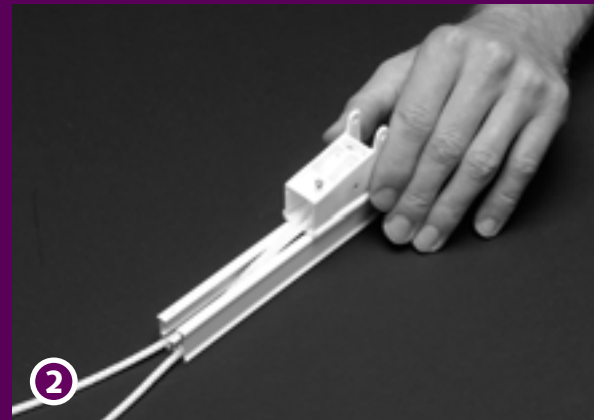

2 Pull one end of the cord through the holes of the first pulley and slide the pulley over the track, like picture shows. With one way draw of CCS®, the Small Pulley has to be used. Fix the pulley onto the track and continue next steps on the other side of the track.

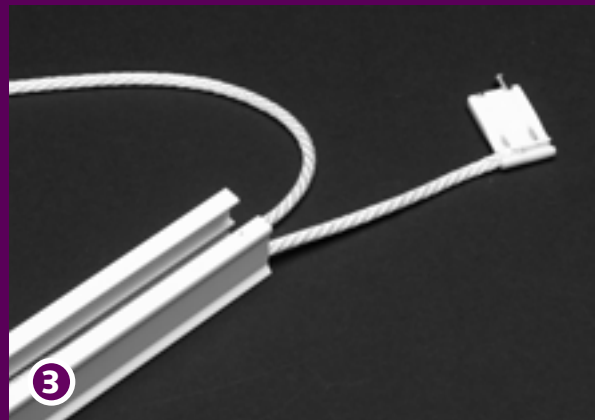


3 Fix the cord half into the cord connector. Ensure, with CCS® that the gap of the cord connector is facing outwards the track and with CKS®, the gap is facing towards the middle of the track. The fixing is easy by making a slide movement of the cord trough the gap of the cord connector.

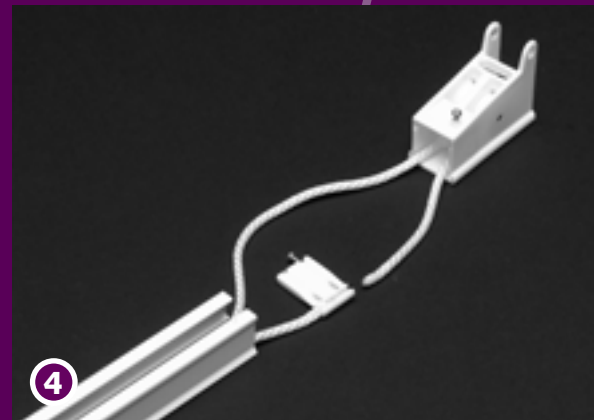


4 Pull the other end of the cord through the second pulley and connect it into the other side of the first cord connector.




5 Slide the master carrier overlap, together with the cord connector into the cord channel of the track.

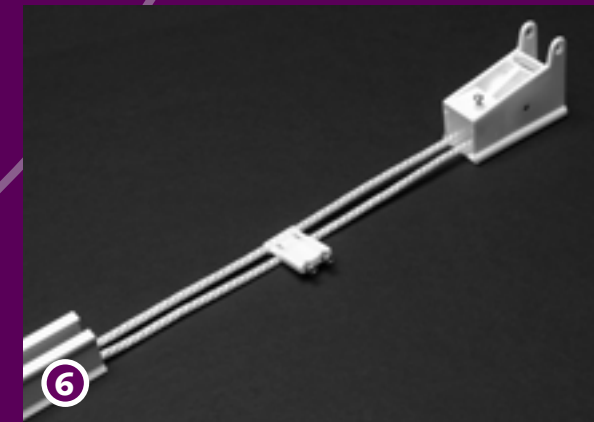

6 Fix the second cord connector on the opposite cord, (CCS® facing outside, CKS® to the middle of the track).

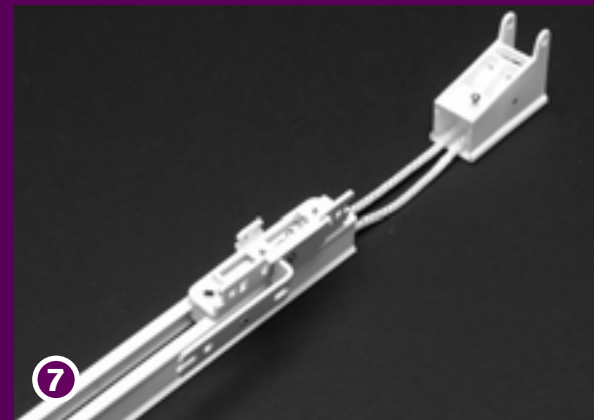

7 Slide the master carrier underlap, together with the second cord connector into the cord channel of the track and fix the second pulley onto the track. Use the screwdriver.

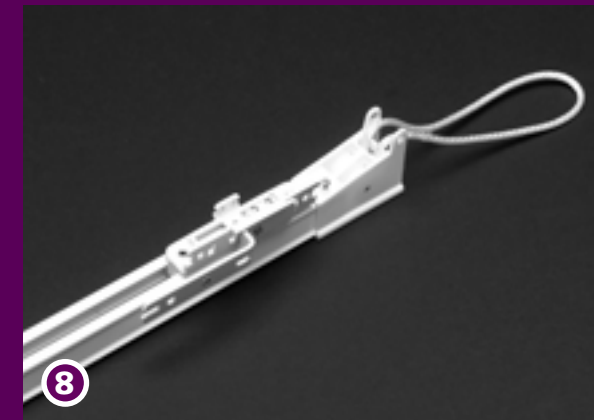

8 By pulling the cord, the side of operation can be determined. Slide the master carriers wide from each other and screw the cord connectors tight. Now, the system is balanced.



9 Ensure that the cord runs behind the metal pin in the pulley. This avoids slack in the mechanism during operation.



10 By pulling the cord through the big gap of the pulley, it will hang straight down the curtain and a good operation is guaranteed.

CCS® & CKS® Assembly - chain.

Instructions for assembling CCS® & CKS®, center- and one-way draw, with chain.

The system with chain is recommended in situations with one or more curves in the track. Steps 1 and 2 of the cord instructions can be followed. Read 'chain' instead of cord. On this page, the difference in assembling will be explained.

Necessary items:	Articlenumber:	Necessary items:	Articlenumber:
CCS-track	30010..	CKS-track	1501001.....
BS Chain 4.5 x 6	3535501000	BS Chain 4.5 x 6	3535501000
CCS Master Carrier Overlap R/L	30157...000	CKS Master Carrier Overlap R/L	1515701000
CCS Master Carrier Underlap R/L	30156...000	CKS Master Carrier Underlap R/L	1515601000
CCS End Pulley	30301...000	CKS Pulley	1530101000
CCS End Pulley Small	30302...000	Drill with bit 1	
Drill with bit 1		Lighter (for heathen the nylon cord)	
Lighter (for heathen the nylon cord)			




1 Remove the metal pins inside the both pulleys. Pull the chain trough the second pulley and cross the two ends of the chain through the master carrier underlap (overlap, when it's a one-way draw). Leave two balls space after the extension of the master carrier and glue the last balls onto each other.



2 Slide this construction into the cord channels of the track, against the first pulley. Leave seven balls out of the cord channel, lifting up through the master carrier. Now, determine side of operation.



3 Slide the second pulley onto the track (don't screw it) and mark the first ball on the opposite chain beside the pulley. This must be done on the other side of the side of operation! Take off the pulley and count eight balls (with CCS®: nine balls) from the marked one. Cut the chain after the ninth ball. Fix the master carrier overlap on the chain by following exactly the same procedure as described above.

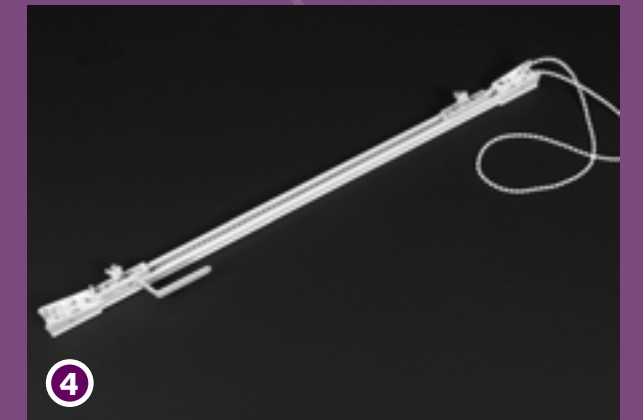


4 Slide the master carriers wide from each other to check that the system is balanced. For a solid construction, use a tie rip on the extension of the master carrier. By pulling the chain through the big gap of the pulley, it will hang straight down the curtain and a good operation is guaranteed.

CCS® & CKS® Assembly – cord adjustability.


Instructions for assembling CCS® & CKS®, with cord adjustability.

This application can be made for CCS®, as well for CKS®. The advantage is that the requested drop height can be determined at a later stage. This feature makes the system very suitable for pre-assembling. This application is also possible for one-way draw. Start, repeating the first two steps of the instructions with cord and continue with the steps below.


Necessary items:	Articlenumber:	Necessary items:	Articlenumber:
CCS-track	30010...000	CKS-track	1501001.....
Nylon cord	1030401000	Nylon cord	1030401000
CCS Master Carrier Overlap R/L	30157...000	CKS Master Carrier Overlap R/L	1515701000
CCS Master Carrier Underlap R/L	30156...000	CKS Master Carrier Underlap R/L	1515601000
CCS End Pulley	30301...000	CKS Pulley	1530101000
CCS End Pulley Small	30302...000	CKS Cord Connector	1530301000
CKS Cord Connector	3030301000	CKS Cord Connector (half)	1530311000
Drill with bit 1		Drill with bit 1	
Lighter (for heathen the nylon cord)		Lighter (for heathen the nylon cord)	

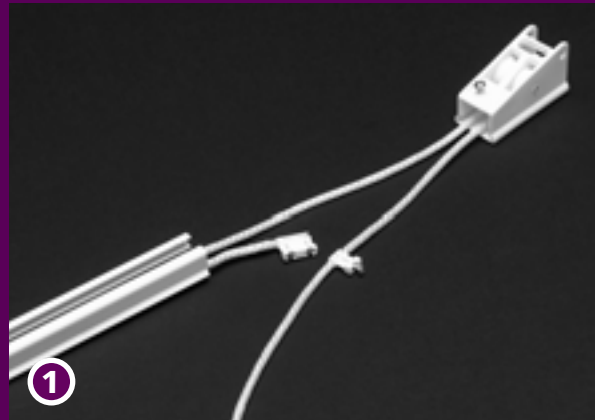


1 Fix one cord connector onto the end of the cord (CCS® facing outside, CKS® to the middle of the track). Slide the half cord connector on the other end of the cord (with CCS®, use a normal CCS cord connector), but do not screw it.

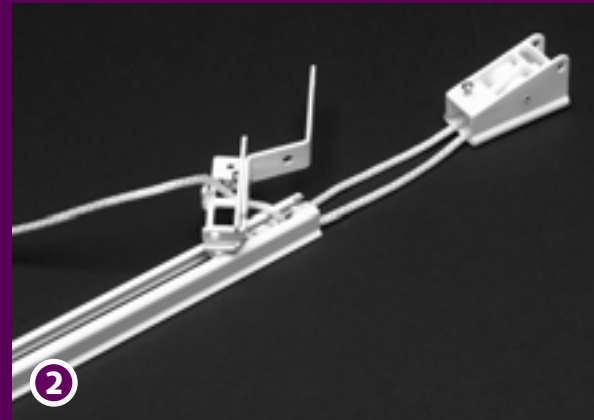

2 Slide the master carrier, together with the two cord connectors into the cord channel of the track. The cord is lifting out of the track, through the first gap of the master carrier overlap.

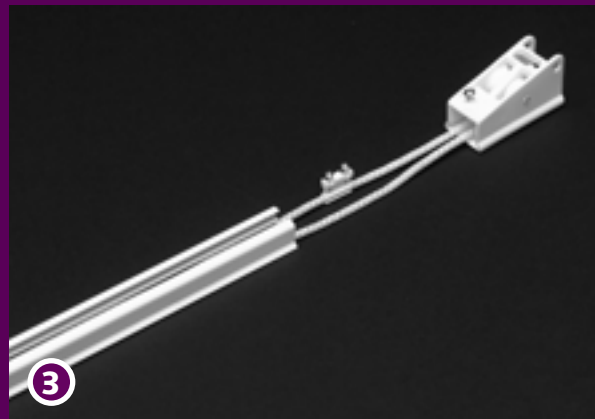

3 Fix the second cord connector on the opposite cord, (CCS® facing outside, CKS® towards the middle of the track).

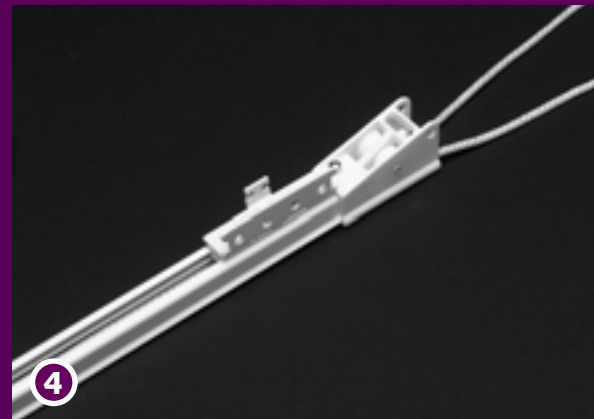

4 Slide the master carrier underlap, together with the cord connector into the cord channel of the track and fix the second pulley onto the track.



5 Determine the cord length by pulling the cord. Pull at the end to reduce the drop height, pull at the loop to increase the drop height. Screw the half cord connector tight to position the cord drop height (with CCS®: the second cord connector in the double construction).



6 If necessary, cut the cord by heating it and make a knot at the end of the cord. Tight this on the extension in the middle of the master carrier overlap. This creates a strong construction.



7 Ensure that the cord runs behind the metal pin in the pulley. This avoids slack in the mechanism during operation.



8 By pulling the cord through the big gap of the pulley, it will hang straight down the curtain and a good operation is guaranteed.







Tips & Suggestions:

- The maximum length for cording / chaining CCS® is as follow: 6,10 mtr (20 Ft.) and for CKS® is 6 mtr (19.7 Ft.).
- The above sizes are without the pulleys! With pulleys, the sizes are as follow:

	centredraw	one-way draw
CCS®	6,18 mtr (20.27')	6,17 mtr (20.24')
CKS®	6,08 mtr (20')	6,08 mtr. (20')

FOREST
DRAPERY HARDWARE

FOREST
DRAPERY HARDWARE

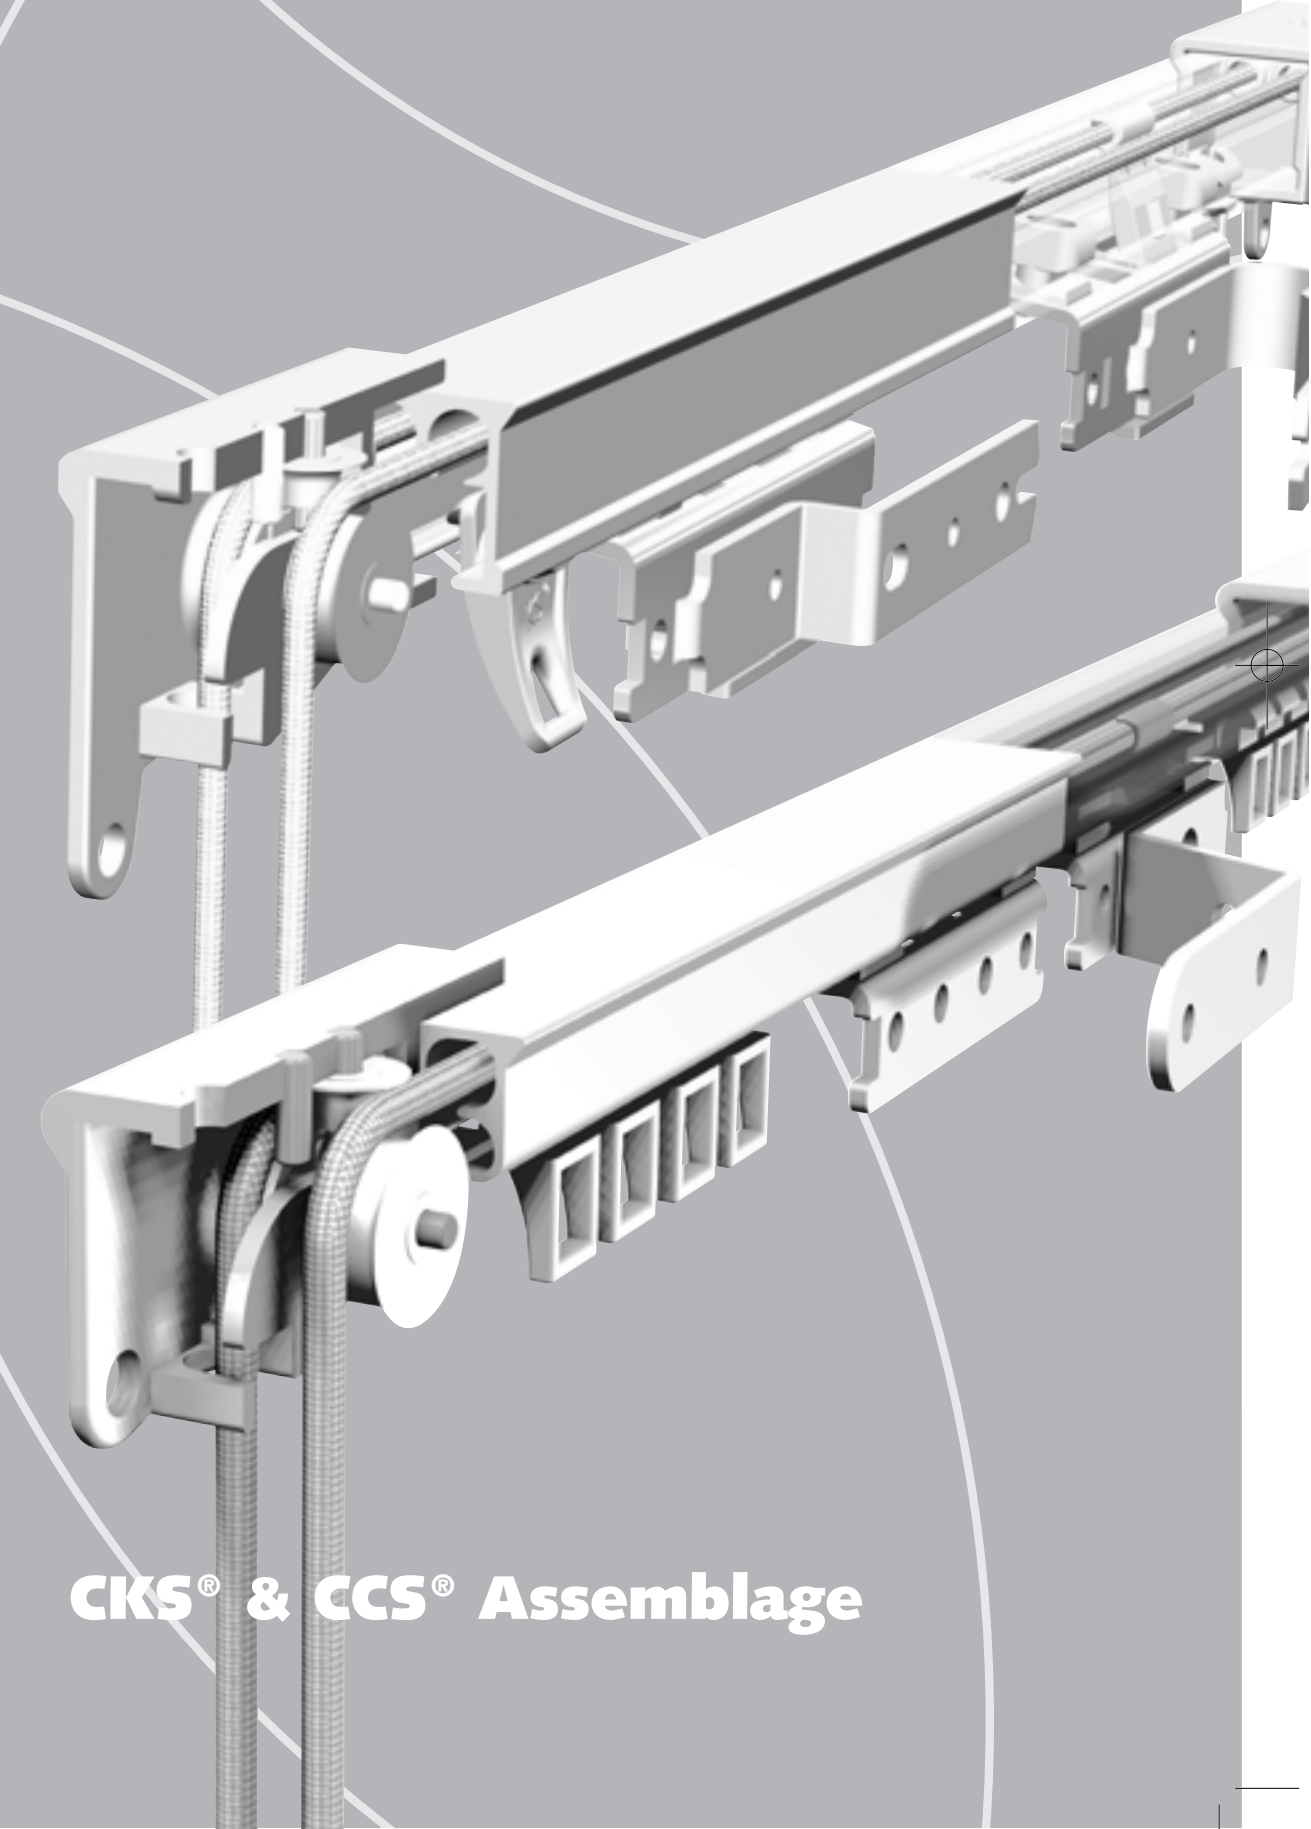

CKS® & CCS® Assemblage